



Three DNM Stereo Solid Core Cables revised 15-10-09

DNM Stereo Solid Core Speaker cable

For normal sensitivity / impedance loudspeakers (below 90db/w / 4-6 ohms nominal)

specifications

4 x 1mm diameter conductors
 resistance 0.021ohms/metre
 capacitance 14pF/metre,
 inductance 1.13uH/metre
 directionality--signal flow in
 print read direction

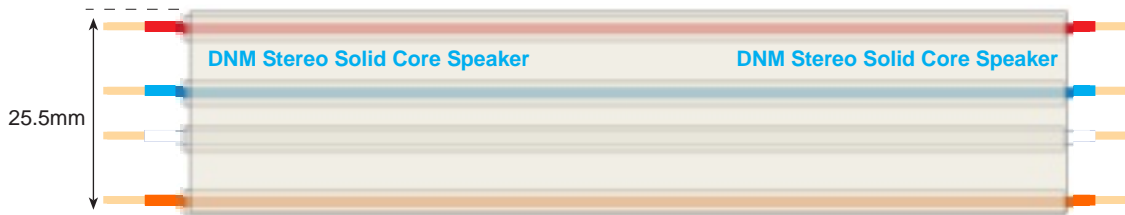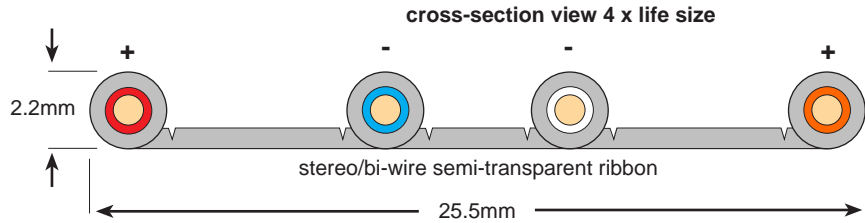


DNM Stereo Solid Core Precision speaker cable

For high sensitivity / impedance loudspeakers (above 90db/w 6 ohms minimum)

specifications

4 x 0.65mm diameter conductors
 resistance 0.053 ohms/metre
 capacitance 15pF/metre
 inductance 1.12uH/metre
 directionality--signal flow in
 print read direction

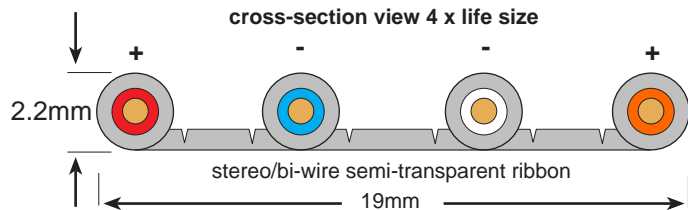

DNM Stereo Solid Core Interconnect cable

specifications

4 x 0.4mm diameter conductors
 resistance 0.134 ohms/metre
 capacitance 13.2pF/metre
 inductance 1.32uH/metre
 directionality--signal flow in
 print read direction

